

SJ PLUS/EVO



SJ



SJ EVO

SUPERDRY SINGLE JET METER

SJ Plus / Evo represents the new generation of single jet meter for residential use. The innovative automated production line combines high production capacity with the highest quality. Sj Plus/Evo achieves the highest metrological performance in its category. It can be equipped with the latest remote data transmission technologies.

SJ PLUS/EVO

FEATURES


- Superdry single jet meter for hot or cold water
- Ideal for domestic indoor divisional applications (submetering)
- MID-certified: R max 160 ▪ DN: 15 and 20
- Options available for reed switch (Plus) or static (Evo) pulse emitter)
- Health certifications available for a number of countries
- Supports various installation positions
- High protection against external magnetic fields
- Register can be rotated 360°
- Can be provided fitted with wired or radio communication module



TYPICAL ERROR CURVE



HEAD LOSS DIAGRAM

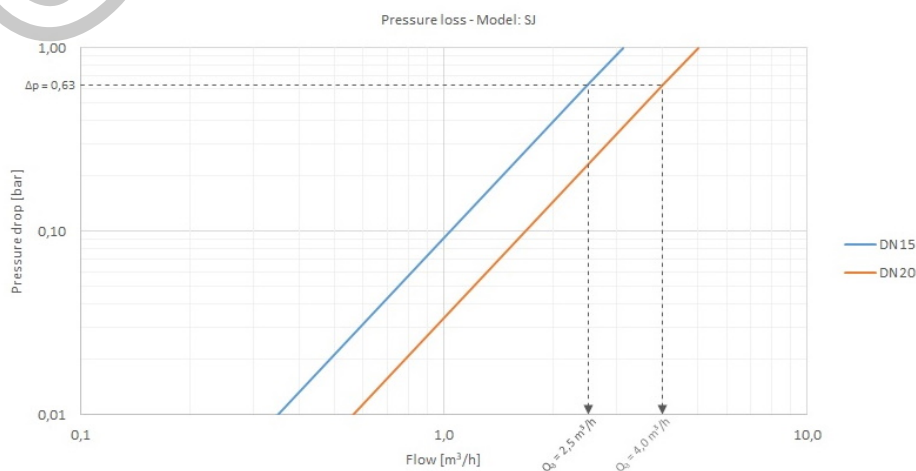

HYDRAULIC PERFORMANCE

Size	mm	15	20
	in	½	¾

Modulo B no. TCM 142/20 – 5700

Modulo D no. 0119-SJ-A010-08

Q₃/Q₁ = R Referred to installation position	$H \uparrow \leq 100$ $H \rightarrow; V \downarrow \leq 50$ $V \uparrow \leq 40$	$H \uparrow \leq 160$ $H \rightarrow; V \downarrow \leq 80$ $V \uparrow \leq 63$	$H \uparrow \leq 100$ $H \rightarrow; V \downarrow \leq 50$ $V \uparrow \leq 40$	$H \uparrow \leq 160$ $H \rightarrow; V \downarrow \leq 80$ $V \uparrow \leq 63$
---	--	--	--	--

MID standard performance *

Q ₃	m ³ /h	1,6	2,5	4
Q ₄	m ³ /h	2	3,13	5

R 100


Q ₁	l/h	16	25	40
Q ₂	l/h	25,60	40	64

* Other values of R available upon request.

TECHNICAL DATA

Maximum permissible error between Q ₁ and Q ₂ (excluded)	+/- 5%		
Maximum permissible error between Q ₂ (included) and Q ₄	+/- 2% with water temperature ≤ 30°C +/- 3% with water temperature > 30°C		
Temperature class	T30, T50, T30/90		
Flow profile sensitivity classes	U0 – D0		
Starting flow rate	l/h	6	8
Head loss	ΔP63		
Nominal pressure	bar	16	
Maximum reading	m ³	100.000	
Minimum reading	m ³	0,05	
Indicative weight	kg	0,35	0,45

DIMENSIONS

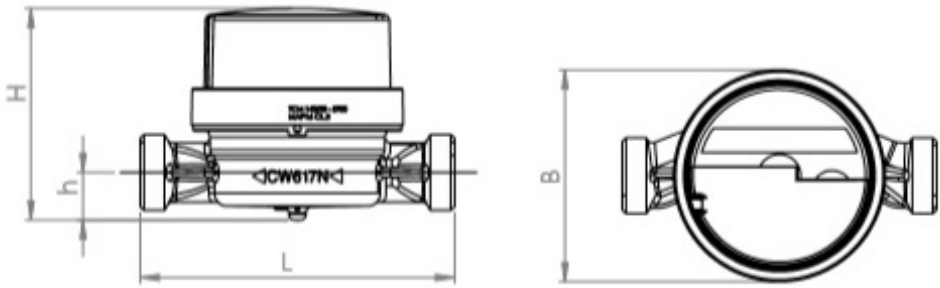

Size	mm	15	20
	in	1/2	3/4
Thread	in	G 3/4 B	G 1 B
	mm	80*/110/115/120/130 *only Q3 2,5 R ≤H100 VR63	115/130
L	mm		
H	mm		74
h	mm	11,7	16,7
B	mm		65

COMMUNICATION MODULES



M-BUS^{EVO}





RADIO^{EVO} 868





REED SWITCH per SJ PLUS

IDROENERGIAITALIA
Master distributor ODE
Sede Legale
Registered Office
00195 Roma (RM) Via Carlo
Mirabello, 14

Ufficio Commerciale e sede logistica
Commercial and Logistic Office
73100 Lecce (LE) - Via Parini, 48
Tel: +39 0832090005
e-mail: info@idroenergiaitalia.it
negoizio@elettrovalvole.info