



Solenoid valve 2/2 way N.C. Direct acting

21AN1K0B15

÷

21AN2K0B55

PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests carried out ensure maximum reliability and duration.

USE: Automation
Heating

PIPES: 1/8 NPT - 1/4 NPT

COILS: 8W - Ø 13 (1)
BDA - BSA 155°C (class F)
BDV 180°C (class H)
12W - Ø 13
UDA 155°C (class F)
14W - Ø 13
GDH - GDV 180°C (class H)
(1) Explosion-proof housing for coils with electrical connections EN 175301-803 on request.

**COIL HOUSING AND COIL FORMER MATERIAL ARE
MADE BY 100% VIRGIN MATERIAL.**

Gaskets	Temperature		Medium
B=NBR (nitrile rubber)	- 10°C	+ 90°C	Air, inert gas, water




Max. allowable pressure (PS) 40 bar

Ambient temperature:

See coils catalogue page for its compatibility..

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I.21AN2K0B15.



Pipe ANSI/ASME BI.20.1	Code	Max viscosity		Ø mm	Kv l/mn	Power watt	Pressure		
		cSt	°E				min bar	M.O.P.D. AC bar DC bar	
1/8 NPT	21AN1K0B15	12	~ 2	1,5	1,4	8	0	30	18
	21AN1K0B20	37	~ 5	2	2	12		22	16
						14		35	30
						8		14	9
	21AN1K0B25	53	~ 7	2,5	3,2	12		30	25
						14		10	6
						8		25	18
	21AN1K0B30			3	4	12		20	18
						14		5	2
						8		12	7
	21AN1K0B45			4,5	6,5	12		8	8
						14		30	18
8						22		16	
1/4 NPT	21AN2K0B15	12	~ 2	1,5	1,4	8		35	30
	21AN2K0B20	37	~ 5	2	2	12		14	9
						14		30	25
						8		10	6
	21AN2K0B25	53	~ 7	2,5	3,2	12		25	18
						14		20	18
						8		5	2
	21AN2K0B30			3	4	12		12	7
						14		8	8
						8		3	1
	21AN2K0B45			4,5	6,5	12		7	2,5
						14		10	5
						8			
	21AN2K0B55			5,5	9	12			
						14			
						8			

Note Also available with brass body without lead.

MATERIALS:

Body	Brass - UNI EN 12165 CW617N
Armature tube	Stainless steel AISI series 300
Fixed core	Stainless steel AISI series 400
Plunger	Stainless steel AISI series 400
Phase displacement ring	Copper - Cu 99,9%
Spring	Stainless steel AISI series 300
Seal	Standard: B=NBR

Orifice:	
≤ 3 mm	Insert slot
> 3 mm	Stainless steel AISI series 300
On request:	Brass - UNI EN 12165 CW617N
Connector	Pg 9 or Pg 11
Connector conformity	ISO 4400

FEATURES:

Electrical conformity	IEC 335
Protection degree	IP 65 EN 60529 (DIN 40050) with coil fitted by connector.


SPARE PARTS:

- Coil:**
See coils list
- Complete plunger:**
For orifice ≤ 3 mm
Code R450886/**B**
For orifice > 3 mm
Code R450898/**B**
- Complete armature tube:**
Code R450606


KIT:

≤ 3 mm KT130KB30-A=**2+3**

> 3 mm KT130KB55-A=**2+3**

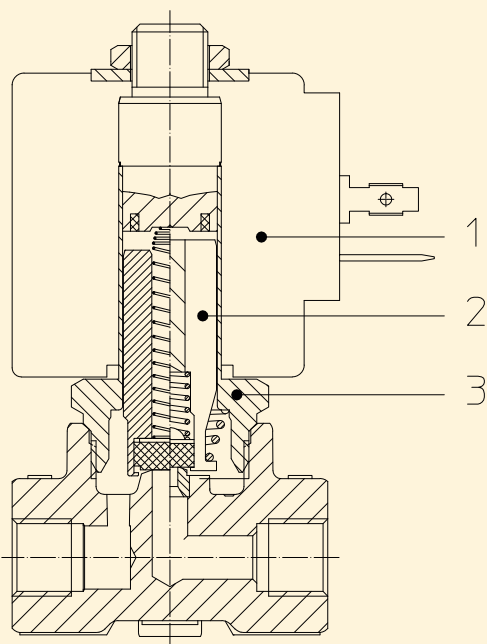

DIMENSIONS:

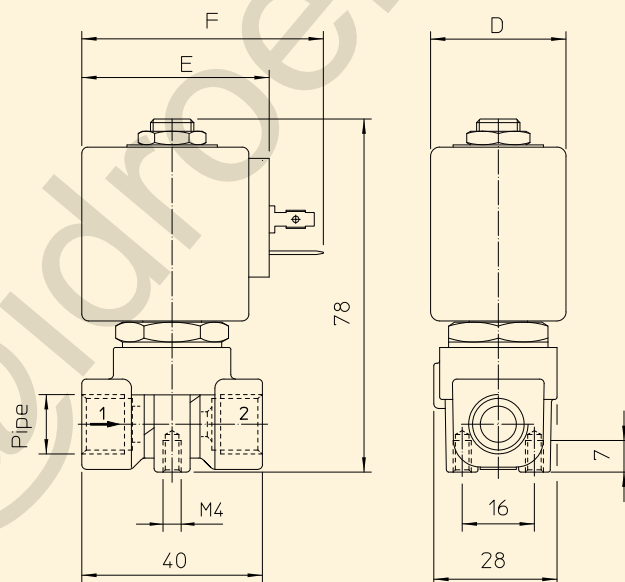

Type	Pipe ANSI/ASME B1.20.1
21AN10KB	G 1/8
21AN20KB	G 1/4

COIL TYPE	POWER ABSORPTION			DIMENSIONS		
	W ---	Hold VA ~	Inrush VA ~	D mm	E mm	F mm
B	8	14,5	25	30	42	54
U	12	23	35	36	48	60
G	14	27	43	52	55	67