



Solenoid valve Normally Open, 2/2 Way, With pilot control - Brass NBR=Buna, EPDM, FKM=Viton

21W3ZB190

÷

21W7ZB500

PRESENTATION:

S.V. with pilot control for interception of fluids compatible with the construction materials.

A minimum operational pressure of 0,2 bar is required.

The materials used and the tests carried out ensure maximum reliability and duration.

USE: Automation
Heating

PIPES: G 3/4 - G 2

COILS: 8W - Ø 13
BDA - BSA 155°C (class F)
BDV 180°C (class H)

**COIL HOUSING AND COIL FORMER MATERIAL ARE
MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS)

G 3/4 - G 1 25 bar
G 1 1/4 - G 2 16 bar


Ambient temperature:

See coils catalogue page for its compatibility.



Gaskets	Temperature	Medium
B=NBR (nitrile rubber)	- 10°C + 90°C	Air, inert gas, water
E=EPDM (ethylene-propylene)	- 10°C +140°C	Water, low pressure steam
V=FKM (fluoroelastomer)	- 10°C +140°C	Mineral oils (2°E), gasoline gas oil

For seals other than NBR replace the letter "B" with the ones corresponding to the other seals. E.I. 21W5ZE350.

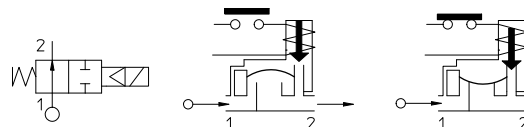

Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power watt	Pressure		
		cSt	°E				min bar	M.O.P.D.	
G 3/4	21W3ZB190	12	~ 2	19	140	8	0,2	16	16
G 1	21W4ZB250			25	190			10	10
G 1 1/4	21W5ZB350			35	400				
G 1 1/2	21W6ZB400			40	520				
G 2	21W7ZB500			50	750				



CE Approval

(Pressure Equipment Directive 97/23/CE)

for S.V. 21W5÷21W7

IDROENERGIAITALIA

Master distributor ODE

Sede Legale

Registered Office

00195 Roma (RM) Via Carlo Mirabello, 14

Ufficio Commerciale e sede logistica

Commercial and Logistic Office

73100 Lecce (LE) - Via Parini, 48

Tel: +39 0832090005

e-mail: info@idroenergiaitalia.it

negoio@elettrovalvole.info

MATERIALS:

Body	Brass - UNI EN 12165 CW617N
Armature tube	Stainless steel AISI series 300
Fixed core	Stainless steel AISI series 400
Plunger	Stainless steel AISI series 400
Phase displacement ring	Copper - Cu 99,9%
Spring	Stainless steel AISI series 300
Seal	Standard: B=NBR On request: E=EPDM V=FKM
Orifice	Brass - UNI EN 12165 CW617N

On request:

Connector	Pg 9 or Pg 11
Connector conformity	ISO 4400

FEATURES:

Electrical conformity	IEC 335
Protection degree	IP 65 EN 60529 (DIN 40050) with coil fitted by connector.

SPARE PARTS:

- | | |
|--|---|
| <p>1. Coil:
See coils list</p> <p>2. Complete diaphragm support:
Code R450788/B</p> <p>3. Complete armature tube without gasket:
Code R450573</p> <p>4. Gasket O-Ring:
Code R990000/B</p> <p>5. Gasket O-Ring:
G 3/4-G 1 Code R990002/B
G 1 1/4-G 1 1/2 Code R990005/B
G 2 Code R990081/B</p> | <p>6. Complete diaphragm:
G 3/4-G 1 Code R450431/B
G 1 1/4-G 1 1/2 Code R450466/B
G 2 Code R450432/B</p> |
|--|---|


KIT:

KT130ZB30-F=2+3+4

MAINTENANCE KIT:

G 3/4 - G 1
KTG0W3ZB19=2+5+6
G 1 1/4 - G 1 1/2
KTG0W5ZB35=2+5+6
G 2
KTG0W7ZB50=2+5+6

DIMENSIONS:

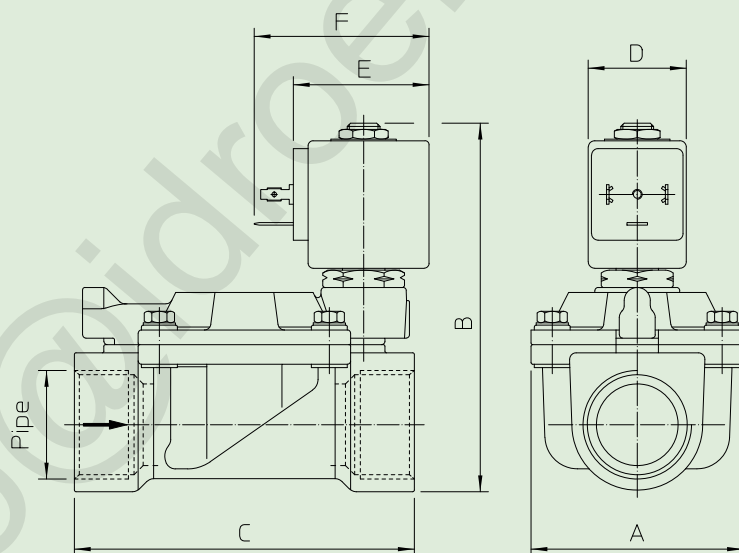

Type	Pipe ISO 228/1	A mm	B mm	C mm
21W3ZB190	G 3/4	65	105	104
21W4ZB250	G 1		112	
21W5ZB350	G 1 1/4	98	125	144
21W6ZB400	G 1 1/2			
21W7ZB500	G 2	118	141	172

COIL TYPE	POWER ABSORPTION			DIMENSIONS		
	W ---	Hold VA ~	Inrush VA ~	D mm	E mm	F mm
B	8	14,5	25	30	42	54